



TABULA

BETONELLA®
L'autentica. Dal 1979

"Tabula" is a betonella® flooring system, each element has a stone look with a clean and elegant texture.




Suitable for slow vehicular traffic of cars only, courtyards of private houses. Sidewalks, areas surrounding buildings, park paths, swimming pool sides, pedestrian-only squares. Parking areas in car parks.



With adequate cemented mixed substrate (recommended) Tabula is suitable for slow traffic up to 35 quintals.

Dimensions cm:

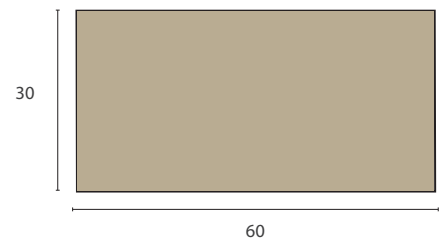


Thickness: 10 cm
Weight: 180 kg/m²
Colors: Arctic, tobacco, gray mix, flamed.

TECHNICAL SPECIFICATIONS (UNI EN 1339) to which TABULA complies

Bending strength and breaking load:	≥ 3,5 MPa
Slip / skid resistance:	Satisfactory
Abrasion resistance:	Class 3 marking H (print ≤ 23 mm)
Weathering Durability - water absorption:	Wa ≤ 6% Class 2 Marking B

LAYING SCHEMES

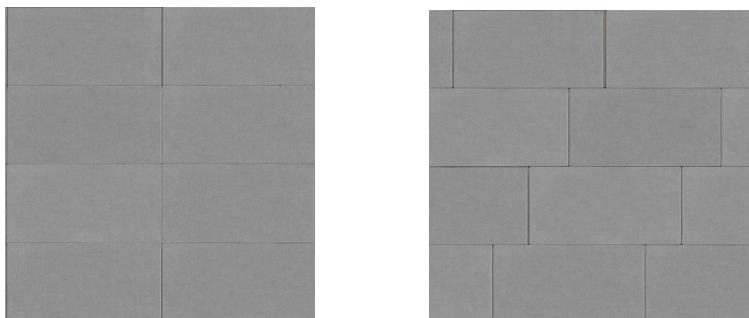

LAYING RECOMMENDATIONS

The blocks will have to be set in place on a suitable substrate, interposing a 3-5 cm granite sand carry-over followed by compaction with suitable vibrating plate. The joints must be sealed with fine, dry high hardness sand.



Gruppo Industriale
TEGOLAIA