


# TUMBLED FENICE



**BETONELLA®**  
L'autentica. Dal 1979

An innovative design slab, composed of four modular formats, that combines the beauty of natural cleft stone to the robustness of the interlocking system. Its finishing, together with the tumbling processing, give it the appearance of the most noble natural cleft stone-paving. Fenice is the highly aesthetic paving that will enhance and make homes special, squares, urban and commercial areas.

Dimensions cm:

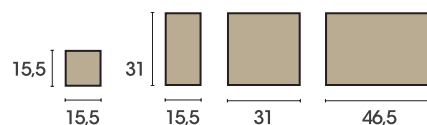

Thickness:	8 cm
Formats per layer :	5pcs (31x46,5) 3pcs (31x31) 2pcs (31x15,5) 2pcs (15,5x15,5)
Weight:	180 kg/m <sup>2</sup>
Colors:	london, mixed grey, flamed red, avana, white quartz



Suitable for slow cars-only vehicular traffic , private house courtyards, sidewalks , areas surrounding buildings, paths in parks, swimming pools sides, pedestrian-only squares.




With appropriate substrate (eg mixed concrete) Fenice is suitable for slow traffic up to 30 q.li axle.

## TECHNICAL SPECIFICATIONS ( UNI EN 1339 ) to which TUMBLED FENICE complies


Bending strength and breaking load:	≥ 3,5 MPa
Slip / skid resistance:	Satisfactory
Abrasion resistance:	Class 3 marking H (print ≤ 23 mm)
Weathering Durability - water absorption:	Wa ≤ 6% Class 2 Marking B

## LAYING SCHEMES


OFFSET LAYING




UNCERTAIN LAYING



MACHINE LAYING



MACHINE LAYING



## LAYING RECOMMENDATIONS

The blocks will have to be set in place on a suitable substrate, interposing a 3-5 cm granite sand carry-over followed by compaction with suitable vibrating plate. The joints must be sealed with fine, dry high hardness sand.



Gruppo Industriale  
**TEGOLAIA**

Gruppo Industriale TEGOLAIA  
Via della Liberazione, 48 Casier (TV)

tel. 0422 6711

info@tegolaia.com  
www.tegolaia.com