


# BASALTINA PARK 8



**BETONELLA®**  
L'autentica. Dal 1979

Basaltina Park 8 has the appearance of natural stone and reproduces very effectively the old basaltic stone paving, still visible today in some historical centres. This allows you to meet the design needs of any context.

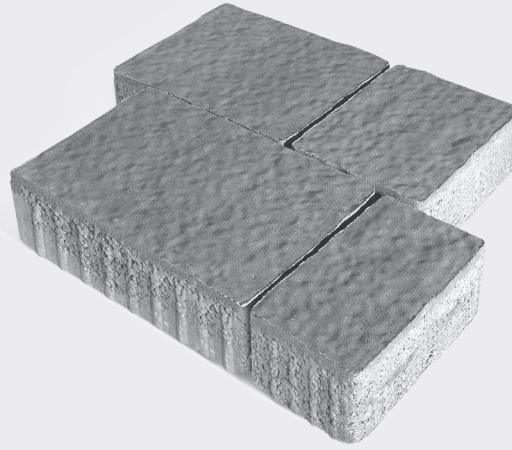

Suitable for slow vehicular traffic with total loads up to 35 q, residential access roads, parking areas in car parks, occasional traffic of service vehicles, roads with medium traffic, service stations.



Machine laying (running laying).


Recommended limit traffic category: 3B  
Traffic classification from "Catalogue for sizing paving in interlocking concrete blocks in urban areas" published by Assobeton (2005) pag. 12 – tabella 2.6

## TECHNICAL SPECIFICATIONS (UNI EN 1338) to which BASALTINA PARK 8 complies

Tensile splitting strength:	≥ 3,6 MPa
Slip/skid resistance:	Satisfactory
Abrasion resistance:	Class 3 marking H (print ≤ 23 mm)
Weathering resistance - Water absorption:	Wa ≤ 6% Class 2 Marking B



## LAYING SCHEMES

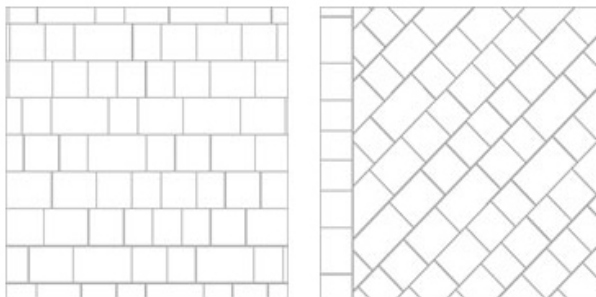

## LAYING RECOMMENDATIONS

The blocks will have to be set in place on a suitable substrate, interposing a 3-5 cm granite sand carry-over followed by compaction with suitable vibrating plate. The joints must be sealed with fine, dry high hardness sand.



Gruppo Industriale  
**TEGOLAIA**

Gruppo Industriale TEGOLAIA  
Via della Liberazione, 48 Casier (TV)

tel. 0422 6711

info@tegolaia.com  
www.tegolaia.com